

TLA-000270G25B




■ 频率范围	0.01 - 27GHz
■ 增益	25dB typ
■ P1dB	15dBm typ
■ 噪声系数	3.5dB@10GHz typ

技术指标@25°C

频率范围	0.01-27GHz
增益	25dB typ
增益平坦度	±2.5dB typ
噪声系数	3.5dB@10GHz typ
P1dB	15dBm
输入反射系数	-15dB
输出反射系数	-10dB
电压	5 V
电流	350mA
工作温度	-20°C ~ 70°C
储存温度	-55°C ~ 100°C
极限电压	7.2V
最大入口功率	-5dBm

外形尺寸

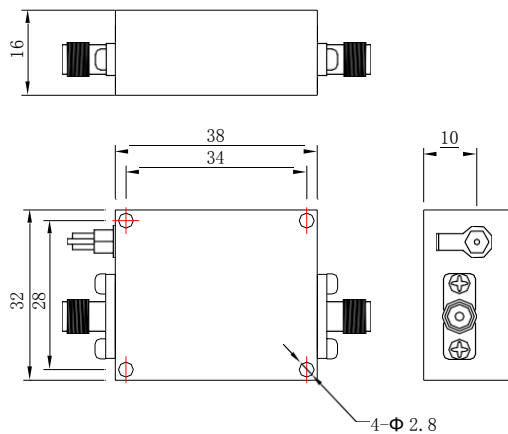

UNIT: mm XB-03

测试曲线 (Temp @+25°C)

订单描述

TLA-000270G25B

指标特性

