



TLA-010200G30A



外形尺寸

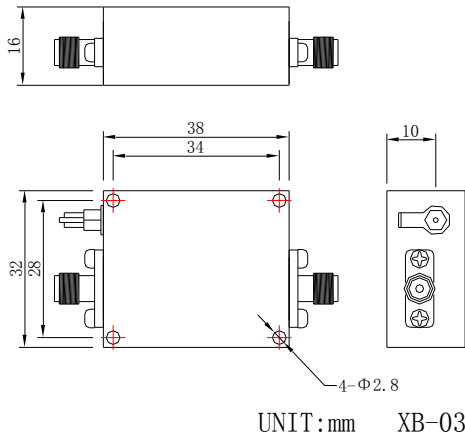

测试曲线 (Temp @+25°C)

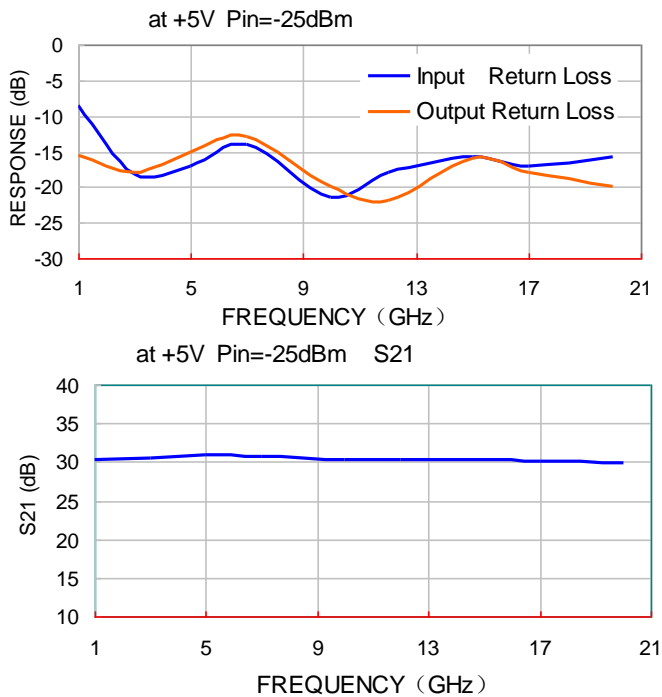


■ 频率范围	1 - 20GHz
■ 增益	30dB
■ P1dB	14dBm

技术指标@25°C

频率范围	1-20GHz
增益	30dB typ
增益平坦度	±1.0dB
P1dB	14dBm typ
输入驻波	2.0 : 1
输出驻波	205 : 1
电压	5V
电流 (最大值)	250mA
工作温度	-20°C ~ 70°C
储存温度	-55°C ~ 100°C
极限电压	8V
最大入口功率	-5dBm
噪声系数	2.5dB

订单描述

TLA-010200G30A  指标特性

