


TLA-001015G13







外形尺寸

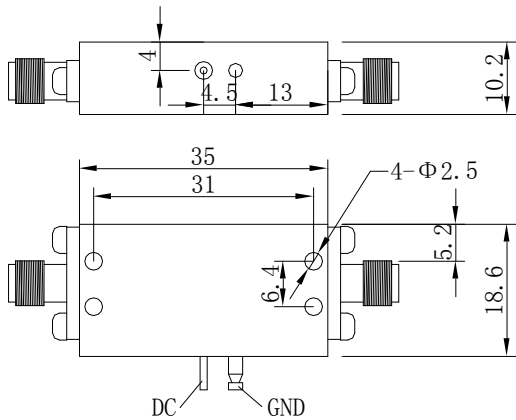

UNIT:mm XB-02A

测试曲线 (Temp @+25°C)

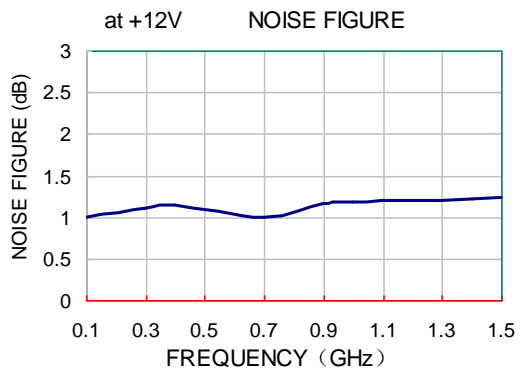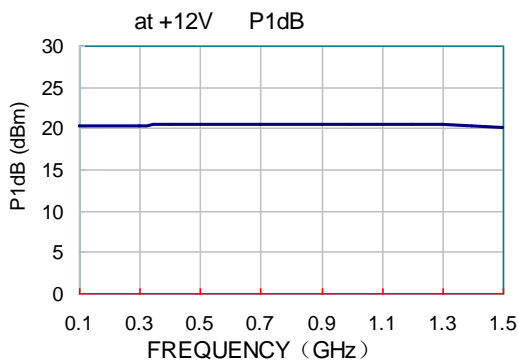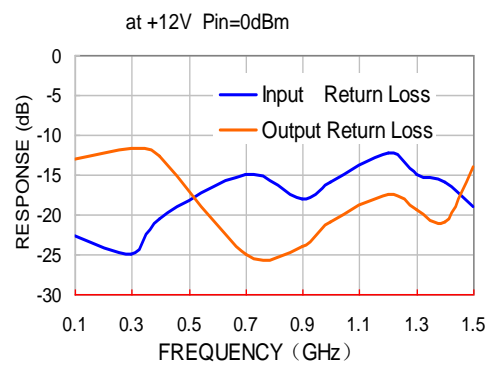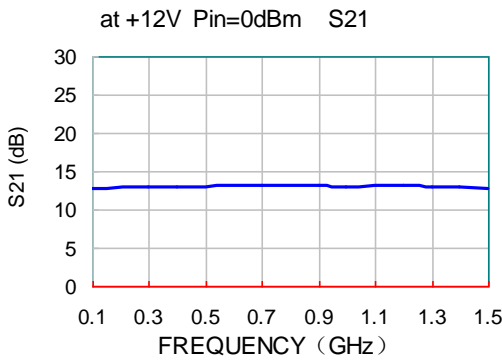

■ 频率范围	0.1 - 1.5GHz
■ 增益	13dB typ
■ P1dB	20dBm typ
■ 噪声系数	1.0dB typ

技术指标@25°C

频率范围	0.1 - 1.5GHz
增益	13dB typ
增益平坦度	±2.5dB typ
P1dB	20dBm typ
OIP3	30dBm typ
反向隔离	30dB
噪声系数	1.0dB
输入驻波	2.5 :1
输出驻波	2.5 :1
电压	12.0V
电流	60mA
操作温度	-45°C ~ 85°C
储藏温度	-55°C ~ 100°C
极限电压	13V
最大入口功率	10dBm

订单描述

TLA-001015G13

指标特性

