


TLA-001060G38



外形尺寸

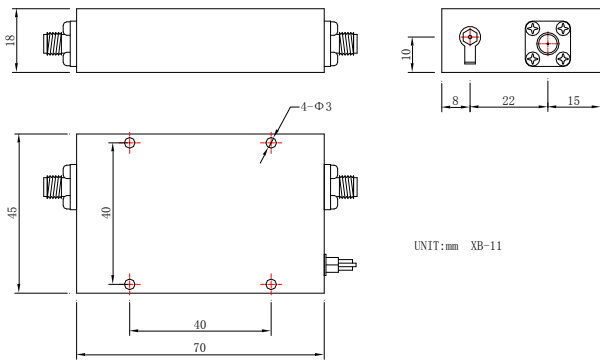

■ 频率范围	0.1 - 6.0GHz
■ 增益	38.0dB typ
■ P1dB	20.0dBm typ
■ 噪声系数	4.0dB@2GHz typ

技术指标@25°C

频率范围	0.1-6.0GHz
增益	38.0dB typ
增益平坦度	±2.0 dB typ
P1dB	20.0dBm typ
噪声系数	4.0 dB@2GHz typ
输入驻波	2.0 :1
输出驻波	2.5 :1
电压	12.0V
电流	300mA
操作温度	-20°C ~ 70°C
储藏温度	-55°C ~ 100°C
极限电压	15V
最大入口功率	-15dBm

订单描述

TLA-001060G38

指标特性

测试曲线 (Temp @+25°C)

