

TLA-018019G30




■ 频率范围	1.8 - 1.9GHz
■ 增益	30dB typ
■ P1dB	5dBm typ
■ 噪声系数	2.0dB typ

技术指标@25°C

频率范围	1.8-1.9GHz
增益	30dB typ
增益平坦度	±1.5dB typ
噪声系数	2.0dB typ
P1dB	5dBm typ
输入驻波	1.5 :1
输出驻波	1.5 :1
电压	12.0V
电流	80mA
操作温度	-20°C ~ 70°C
储藏温度	-55°C ~ 100°C
极限电压	13V
最大入口功率	-20dBm

外形尺寸

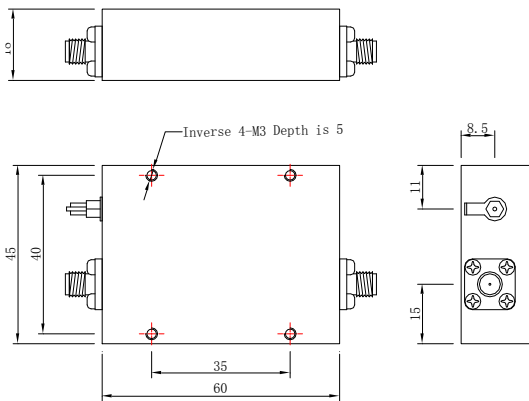

UNIT: mm XB-07A

测试曲线 (Temp @+25°C)

订单描述

TLA- 018019G30

指标特性

