

## TH5834A



### 典型的应用领域


- 缓冲放大器
- 小信号线性增强
- L~C波段的宽带放大
- 实验室测试设备

■ 频率范围	0.5~6.0GHz
■ 增益	28.0dB typ
■ P1dB	30.0dBm typ

### 技术指标@25℃

频率范围	0.5~6.0GHz
增益	28.0dB typ
增益平坦度	±2.5dB typ
P1dB	30.0dBm
输入驻波比	3.0:1
输出驻波比	3.0:1
电压	AC 220V
工作温度	-20℃~+70℃
储存温度	-55℃~+100℃
最大入口功率	+5dBm
结构尺寸	250mm×204mm×48mm

### 外形尺寸

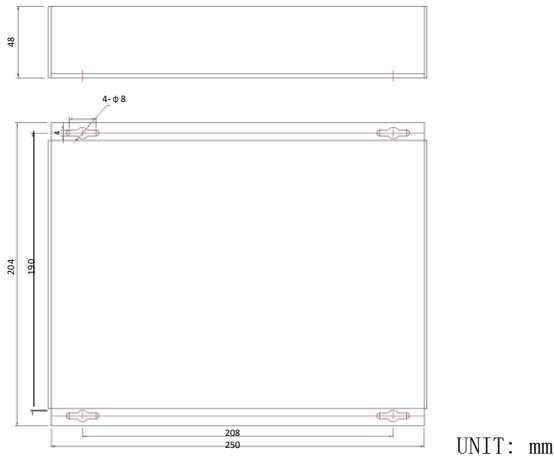

### 测试曲线 (Temp @+25℃)

### 订单描述

## TH-5834A 指标特性

